

# HT 11 USA

## DIHR HT11USA Hood Type Upright Dishwasher

- Double walled 304 stainless steel structure, 316 grade boiler.
- Two wash cycles 120 and 180 seconds, partial drain to save water, power and chemicals.
- Overflow and drain system has triple filters to protect the main pump.
- Long lasting split s/s wash and rinse arms are interchangeable for easy assembly after cleaning.
- Hood operated start and stop functions for ease of use.
- Comes complete with detergent, rinse and drain pumps.
- Straight through or corner applications, very simple to change.
- Anti-drip roof design to reduce spotting.
- Anti-vermin bottom panel included.
- Available in 220V or 240V, single or triple phase, single is stocked in Canada, 45.6 amps.
- Comes standard with 70f degree rise booster/heater
- Certified by ETL, CSA and NSF to the highest standard. Comes with three gauges for wash temp, rinse temp and water pressure.
- Comes with three racks and two cutlery cylinders.
- Three Years Warranty, one year parts and labour, additional two years on major components.



40 East Pearce St. Richmond Hill, ON, L4B 1B7. Tel: 1-800-263-1455 [servecanada.com](http://servecanada.com)




# HT-11 USA

( ETL ) ( 1 - phase model )

Data. 05/2019

Series

DW014

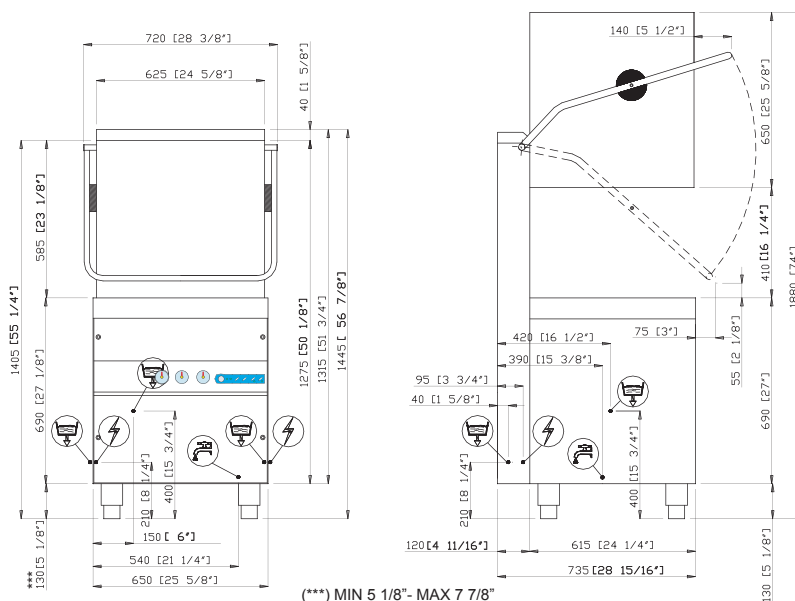

	<b>WATER CONNECTION 3/4"G</b>
	<b>DRAIN 15/16 inch</b>
	<b>ELECTRICAL SUPPLY</b>

EXTERNAL DIMENSIONS	
width	(inch) 28 3/8"
depth	(inch) 28 15/16"
height	(inch) 56 7/8" - 74" ( open hood )
WEIGHT	(lbs) 231
VOLTAGE	220/240V 1ph 60 Hz
POWER REQUIRED	10920W /1ph- 45.6amp / 3ph-28.3amp
WATER HARDNESS	2 - 8 °F
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI
CHINA DIMENSIONS	
max. plate diameter	(inch) 16 1/4"
max. tray dimension	(inch) GASTRONORM 1/1
RACK DIMENSION	(inch) 20" x 20"
RACK EQUIPMENT	2 peg racks, 1 flat rack, 2 cylinders racks
WASHING CYCLES	(sec) 1 ( 120 ) 2 ( 180 )
WATER SUPPLY 131°F	
racks/h(*) <sup>(1)</sup>	30 20
WATER SUPPLY 50°F	
racks/h(*) <sup>(1)</sup>	30 20
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi )	0.79 [gal(US)]
BOOSTER CAPACITY	2.66 [gal(US)]
BOOSTER HEATING ELEMENT	9800 W
RINSING TEMPERATURE (SET)	185°F
TANK CAPACITY	7.93 [gal(US)]
TANK HEATING ELEMENT	2940 W
TANK TEMPERATURE (SET)	160°F
PUMP POWER	1120 W (166 gal(US)/min***)
DRAIN PUMP	43W hMAX 31 1/2"(10,78 gal(US)/min***)
NOISE	63,6±0.7 dB(A)

(\*) STANDARD THERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

(<sup>1</sup>) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.